
NAUGRA®

Product name:	Product code:
Precision Toolroom Lathe 1000 mm	CMI-NP-0886

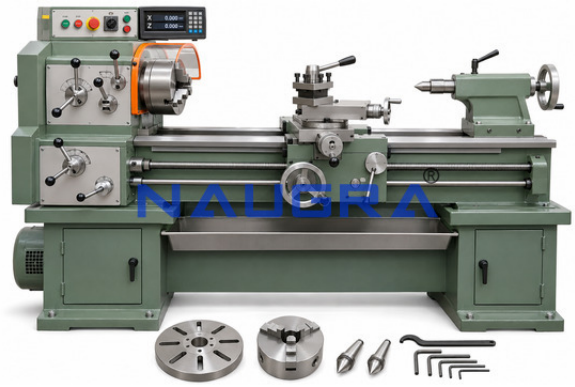

Description

A rigid cast iron centre lathe with 280 mm swing over bed and 1000 mm between centres, used for turning, facing, boring, threading and taper work in workshops and training institutes.

Technical specification

Spindle speeds	50 to 3000 rpm in 12 steps
Bed width	190 mm
Main motor	3 HP (2.2 kW), 3 phase, 415 V AC 50 Hz
Metric threads	0.5 to 7 mm pitch
Tailstock taper	MT3
Construction	Cast iron bed and headstock

Standard Accessories

- Faceplate
- Three jaw chuck
- Dead centres
- Tool post spanner set

Precision Toolroom Lathe 1000 mm is built on a hardened and ground bed with a geared headstock for dependable cutting. It suits engineering colleges, ITIs and production workshops for practical machining training and light production jobs.

NAUGRA®
Civil Laboratory Equipment Manufacturers and Suppliers India Civil Lab Exportrs India
Email us at: export@civilmechanicalindia.com

Features

- Hardened and precision ground bed ways
- Geared headstock with multiple spindle speeds
- Lead screw and feed rod for threading and feeds
- Quick change gear box for inch and metric threads
- Precision ground spindle with taper roller bearings for fine finish
- Emergency stop and chuck guard for safe operation

Technical Specifications

Swing over bed	280 mm
Distance between centres	1000 mm
Spindle bore	30 mm